

Our popular bench trunking units are available in one-gang, two-gang or combined one and two-gang socket mounting boxes. Back to Back units and additional combinations can be supplied to order.


For the convenience of the installer, all bench trunking products can be supplied pre-wired.

Please contact our Sales Team for further information on the range.

Dimensions & Cable Capacities for Bench Trunking

Data Cable Diameter	Nominal CSA	Compartment A		
		6300mm ²	6296mm ² & 25mm Back Box (4582mm ²)	6296mm ² & 35mm Back Box (3860mm ²)
		45% Fill (2833mm ²)	45% Fill (2061mm ²)	45% Fill (1737mm ²)
5mm	19.6mm ²	144	105	88
5.5mm	23.8mm ²	119	86	72
6mm	28.3mm ²	100	72	61
6.5mm	33.2mm ²	85	62	52
7mm	38.5mm ²	73	53	45

Power Cable Conductor CSA	Cable Factor	Compartment A		
		6300mm ²	6296mm ² & 25mm Back Box (4582mm ²)	6296mm ² & 35mm Back Box (3860mm ²)
		45% Fill (2833mm ²)	45% Fill (2061mm ²)	45% Fill (1737mm ²)
1.5mm ²	8.6	329	239	201
2.5mm ²	12.6	224	163	137
4mm ²	16.6	170	124	104
6mm ²	21.2	133	97	81

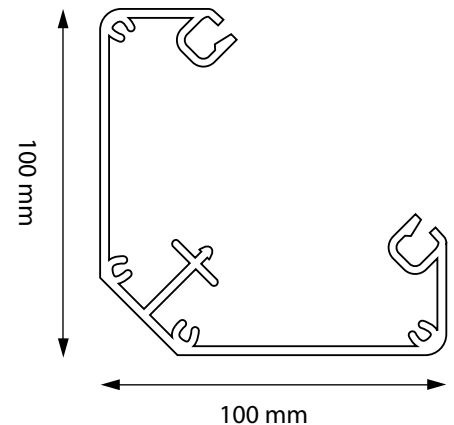

Typical cable loading information in line with wiring regulation BS 7671 (45% CSA Fill)