


## SWCT Technical Information

# Safe Working Loads

The cable trays were tested across two spans and a cantilever. The deflection is measured on the central span using three sensors placed on the sides and at the centre to the tray.

The test method conforms to the BSEN 61537 standard.

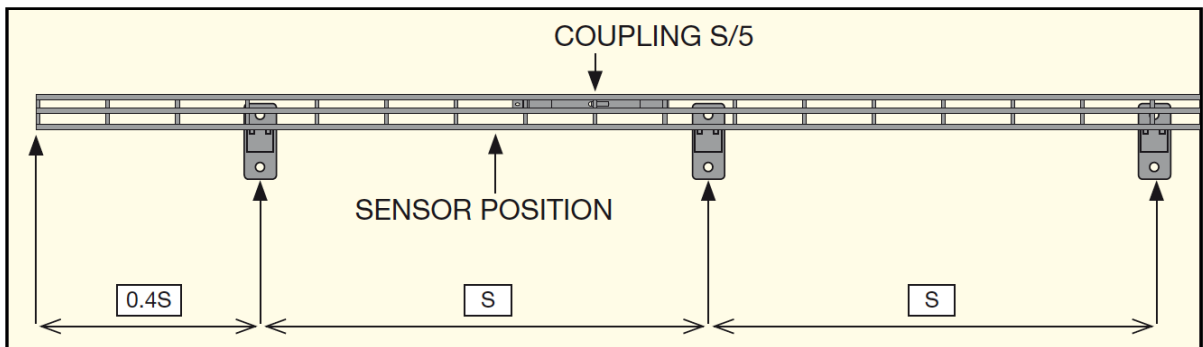

Note: The maximum deflection of  $1/100$  is always reached for a lesser load than that of the safety load. (The breaking point divided by a safety co-efficient of 1.7).  
CEI/61537

